


CPP/2436 – Series

Heat Shrinkable Straight Through Joint Suitable upto
33KV 3Core Screened PILC Cables (24KV & 36KV Series)

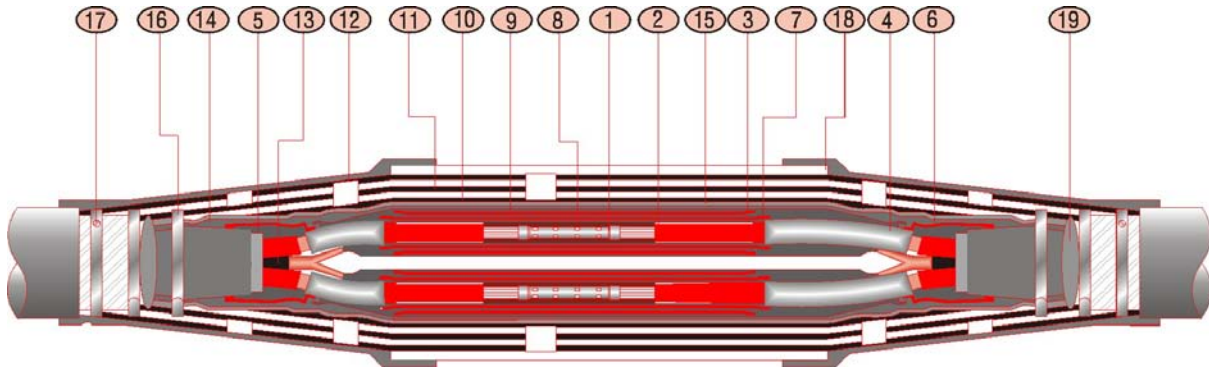

S. No.	Description	S. No.	Description
1.	Inline Connector	11.	Metallic Protection Cage
2.	Stress Control Mastic	12.	Adhesive Lined Side Sleeve
3.	Oil Barrier Sleeve	13.	Insulating Wedge
4.	Conducting Tube (Black)	14.	Copper Mesh Tape
5.	Void Foiler	15.	Earth Lead
6.	Conducting Breakout	16.	Constant Force Spring Clamp
7.	Grey Mastic	17.	Worm Drive Clamp
8.	Stress Control Tubing (Black)	18.	Outer Jacketing Sleeve
9.	Insulating Tube (Red)	19.	Earthing Plumb
10.	Dual Wall Tubing (Black+Red)		

Electrical Performance

Tests	15-24KV System (8.7/15KV,11/11KV,12.7/22KV)	36 KV (19/33KV)
AC Dry Withstand voltage	50Kv/1 Minute	75KV/1 Minute
D.C. Voltage withstand test	96 KV / 30 Minutes	144 KV / 30 Minutes
Lightening Impulse withstand Voltage	125 KV	170 KV

Note

- All kits are supplied with full kit contents for making a straight through through joint

Compaq International

Tel. : 00 - 91 - 1732 - 268 258 Fax : 00 - 91 - 1732 - 268 293
Email: heatshrink@compaqheatshrink.com
web: <http://www.compaqheatshrink.com>